

Markpoint MP3000

print & apply outer case labelling system.



MARKPOINT MP3000: SPECIALLY DESIGNED FOR HEAVY-DUTY INDUSTRIAL OUTER-CASE APPLICATIONS FOR SIDE, TOP OR ADJACENT SIDES LABELLING

MP3000 print and apply labelling system is, in line with all Markpoint products, designed for heavy and demanding industrial environments. Its key components are made of easy accessible and exchangeable modules, in order to guarantee high user availability, flexibility and a fast, cost-effective after sales support. The MP3000 complies with the demand for outer-case, adjacent sides labelling and printing required including ITF14 and EAN128 bar codes in crisp clear quality.

The MP3000 is easy to program and can be operated as a stand-alone unit via the Markpoint keyboard-terminal. It can also be connected to a computer system, for total control of all printed information. MP3000 has a proven quality and a large reference list of successful installations. Its robust, industrial-environment design makes the MP3000 to be one of the most reliable print & apply pallet labelling systems on the market.

Media specification

- Dye cut direct thermal self-adhesive labels
- Roll diameter: outer 350 mm, inner core 76 mm
- Label format:
 - maximum lengths: 300 mm
 - minimum lengths: 80 mm
 - maximum width: 120 mm
 - minimum width: 50 mm

Application specification

- Product sensing by photo cell
- Application type: side, top, front or ATC
- Capacity:
 - top & side: 25 labels per minute
 - ATC: 22 labels per minute

Printing specification

- Resolution: 8 dots/mm (200 dpi)
- Maximum print width: 104 mm

Interface specification

- RS232 9-pole keyboard/ computer interface

Operating environment

- Temperature: +5° to +40°C
- Relative humidity: 20 - 85%
- Air requirements:
 - xx l/min clean, dry, oil free at 5bar
 - 30 l/min

Electrical specification

- Power requirements: 220/240 Volts , 1 amp, 50Hz
- Meets the requirements of the harmonized standards related to the EMC directive.

Physical dimension

- Length 1000 mm
- Width 450 mm
- Height 260 mm
- Weight 35 kg


Options

- Stand
- Visual paper low alarms
- Air knife

Function and operation

- On-line or stand-alone operation
- ASCII-programmable data communication
- RS232 data communication interface
- Exchangeable modules
- High availability

Application

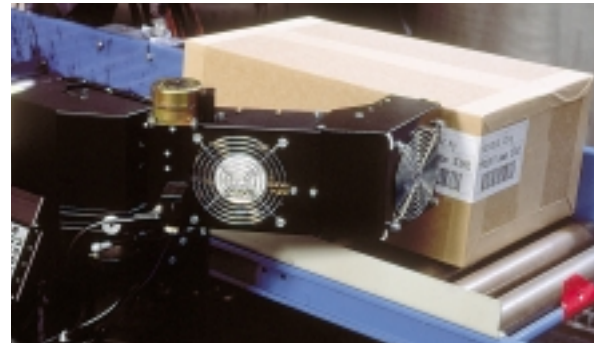

Adjacent sides labelling

Markpoint products are under continuous development and we therefore reserve the right to change the specification and design without prior notice.



THE HUMAN PRINTER PHILOSOPHY

Markpoint Printer Industry AB
Säterigatan 20, S-417 64 Göteborg, Sweden
Tel.: +46 31 656900 Fax: +46 31 220650



Jagersdreef 1F
2900 Schoten
Belgium
Tel. +32(0)3-633 99 99
Fax. +32(0)3-633 99 90
<http://www.commit.be>